




CableGlider®

T D P F B P

CableGlider® Standard (STD) Cable Puller

The Condux CableGlider® STD Cable Puller offers portability and ease of set-up in a completely self-contained unit to adapt to a variety of pulling situations. It comes equipped with a two-speed removable power pack, providing up to 6,500 pounds (28,912 N) of pulling force at low speed. Speed changes are no problem with just a turn of a dial. Design features include a self-tailing capstan for added stability, a pivoting arm and a foot switch for operator convenience and safety. Accepts all diameter rope (self-tailing capstan accepts 5⁄8" (16 mm) to 7⁄8" (22 mm) rope only).

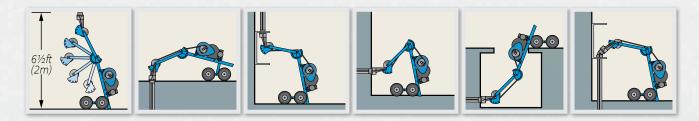

Product Models		10650 106505
CableGlider® STD - 110 Volt Cable Puller	\checkmark	
CableGlider® STD - 110 Volt Cable Puller Split		\checkmark
What's in the box?		
Puller	✓	\checkmark
Foot Switch	\checkmark	\checkmark
Retaining Fork	\checkmark	
Split Retaining Fork		\checkmark
Conduit Adapters	\checkmark	
Split Conduit Adapters		\checkmark
2" (51mm)	\checkmark	\checkmark
3" (76mm)	\checkmark	\checkmark
3 1/2" (89mm)	\checkmark	\checkmark
4" (102)mm	\checkmark	\checkmark
Tool box for the accessories	\checkmark	\checkmark

31 Jul 2014 :: Version 1 :: US





Specifications

Description and Dimer	nsions					
Weight:	102.51Kg					
Packaged Weight:	120.65Kg					
Total Size:	Length 147.32cm x Width 68.58cm					
Maximum Reach:	2m					
Color:	Blue					
Arms:	Single					
Drive:	Chain					
Pawl:	Anti Rotational					
	Low / Low Speed Low / Hi		Low / Hig	igh Speed		
Pulling Force	lbs	kN	lbs	kN		
Maximum	6,500	28.9	3,500	15.6		
Continuous	4,000	17.8	2,000	8.9		
Pulling Speed	ft/min	m/min	ft/min	m/min		
No Load	17.5	5.3	39.2	12		
At 2,000 lbs (8.9 kN)	13.5	4.1	18.8	5.7		
At 4,000 lbs (17.8 kN)	9.5	2.9	_	_		
At 6,000 lbs (26.7 kN)	7	2.1	_	_		
Power Requirements						
	115 VAC @ 10 Amp Min, 30 Amp Optimum					
Peak Power	4.82 hp (3.6 kW)					
Generator	4000 Watt Recommended*					
Capstan						
Description	Self tailing					
Diameter	13.97cm					
Width	11.18cm					
Tires						
	Height			Width		
Front		7.62cm				
Back	25.4cm 8.89cm					

*Note: Use of less than the recommended wattage generator may effect the pulling specifications listed above

Advantages

- Portable
- Easy Set-up
- Completely self contained unit

Features

- Two speed removable power pack
- 6500 pounds of pulling force at low speed
- Self Tailing Capstan for added Stability
- Accepts all diameter rope
- Pivoting Arm
- Vertical pull from floor
- Vertical pull down from box
- Horizontal pull
- Horizontal Vault Pull
- Vertical Pull with 45 degree elbow

Options

- Transformer Volt Converter 4000 Watt
- Power Packs
- Adjustable Manhole Adapter
- Floor Mount Frame
- Floor/Conduit/Pole Mount Frame
- Extension Frame
- Conduit Adapters